


## Shoulder – round



Position of the shoulder.

Code: 1005

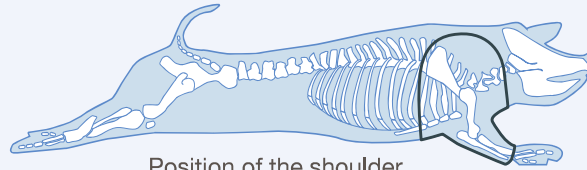

1 Forequarter of Pork



2 Remove the foot at the joint as illustrated.



3 Make a mark on the first rib 10 mm from the edge of the neck bone and cut and saw through the rib bones parallel with the backline.



4 Remove the collar by following the natural seams and ...



5 ... the brisket ribs taking care not to cut into the underlying brisket muscle.



6 Remove the excess fat and rind by following the contours of the shoulder.



7 Shoulder – round.