


Tomahawk Rack



Code: 2035

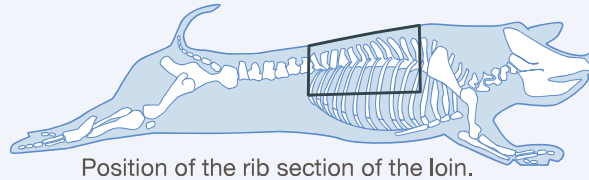

1 Middle of pork. Make a mark on the first loin rib 20 cm from the tip of the loin eye muscle and remove the belly in a straight line from the loin.



2 Remove the lumbar section from the loin as illustrated.



3 The top of the ribs joint to the vertebrae are sawn through and ...



4 ... the vertebrae's and feather bones are removed.



5 Make a mark 25 mm from the tip of the eye muscle and ...



6 ... trim meat to expose the ribs. Cut in between the ribs to create Tomahawk Rack.