


Mini Leg Joint with Crackling – boneless



Position of the leg and chump.

Code: 2036

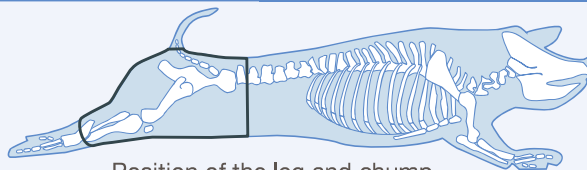

1 Remove the thin muscle situated on top of the hip bone.



2 Remove the lumbar vertebrae, hip and tail bones.



3 Peel back the layer of rind and fat from the top side.



4 Remove the topside by following the natural seams.



5 Remove the shank.



6 Shank – hindquarter.

Mini Leg Joint with Crackling – boneless (continued)

Code: 2036



7 Remove the femur.



8 Remove the patella.



9 Trim and remove ...



10 ... excess gristle and fat.



11 Follow the silverside gristle and ...



12 ... separate the silverside, salmon cut and heel muscle ...

Mini Leg Joint with Crackling – boneless (continued)

Code: 2036



13 ... from the rump and thick flank.



14 Remove excess fat, gristle and rind from ...



15 ... both muscle blocks.



16 Cut both muscles blocks.....



17lengthways into two.



18 Secure with roasting bands at regular intervals.

Mini Leg Joint with Crackling – boneless (continued)

Code: 2036



19 Cut into required size mini joints.



20 Mini Leg Joint with Crackling – boneless.



21 Mini Leg Joint with Crackling – boneless.