


Belly Pin Wheels



Position of the belly.

Code: 3043

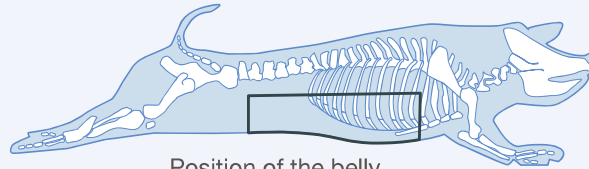

1 Bone-in Belly.



2 Remove rind and excess fat from the belly.
Maximum fat thickness not to exceed 10 mm



3 Remove breast bone (Sternum) and expose
rib cartilage.



4 Remove ribs and cartilage by sheet boning.



5 Boneless, rindless and trimmed belly.



6 Roll and skewer belly and cut into portions.