


Fillet Tail on the bone

Code:

Fillet B015

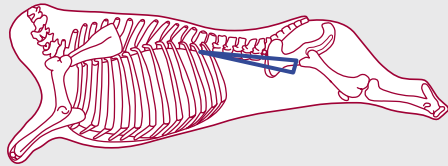

1. Position of the fillet.

2. Sheet bone the sirloin leaving the bones attached to the fillet.

3. Saw and remove excess back bones from the fillet.

4. Bones not to exceed 25mm thickness at any point.



5. Cut and saw into Fillet Steaks on the bone of required weight/thickness.

6. Fillet tail on the bone. The thickest part of the fillet tail should be 40mm minimum.

