Beef Back Ribs – 4 bone Rack
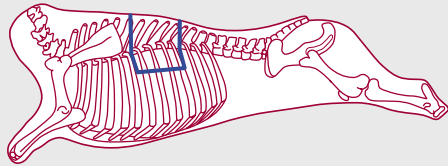
1. The fore rib should be removed from the carcase between rib bones 6-7 and 10-11 (counting from the neck upwards).

2. The length of the tail is not to exceed 60mm from the outer tip of the eye muscle.

3. Remove the bone by sheet boning.

4. Saw to remove the rib section.

5. Saw ribs in half to create Beef Back Ribs - 4 bone racks.

QUALITY STANDARD beef English

AHDB BEEF & LAMB