


Shoulder – Noisette Joint

Code:

Forequarter L010

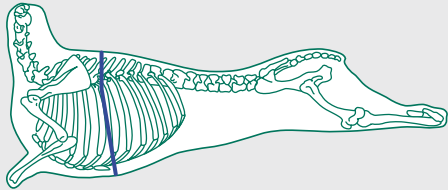

1. The position of the forequarter on the carcass.



2. The shoulder is seam cut from the forequarter.



3. Remove the knuckle by cutting through the joint of the humerus and radius/ulna.



4. Release the muscles on the underside of the bladebone.



5. Carefully remove the blade bone.



6. Remove the humerus...



7. and any fat deposits.



8. Cut along the feather muscle to separate the shoulder into two equal portions.

Shoulder – Noisette Joint – continued

Code:

Forequarter L010



9. Form the part of the LMC muscle into...



10. a cylindrical shape...

(The remaining part can be used for dice.)



11. and retain in shape with elasticated netting.
Square ends.



12. Prepared cut ready to slice into noisettes.