


Leg Joints – Whole Leg (A)

Code:

Leg L040

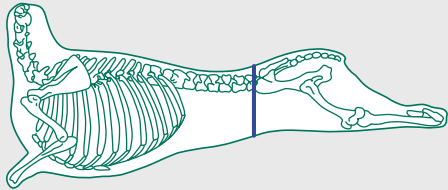

1. Position of the leg and chump.

2. Remove aitch, back and tailbones.

3. Remove the topside muscle by following the natural seams. Remove fat deposits.

4. **Topside Roast Code: Leg L010.**
Maximum fat thickness 5mm.



5. Alternatively, the topside can be cut into half to create **Mini Roast (Topside) Code: Leg L011.**

6. The rump is removed by a square cut in line with the top of the femur bone.

7. Lamb Rump Roast.

8. Alternatively, the rump can be cut into half to create **Lamb Rump Pavés Code: Leg L036.**



Leg Joints – Whole Leg (A) – continued

Code:

Leg L040



9. Remove the knuckle by cutting through the joint between the femur and tibia/fibula.

10. **Lamb Shank Code: Leg L022**

11. The silverside section of the remaining muscle block is removed using a straight cut...

13. ...in line with the top and bottom of the femur bone. **Lamb Silverside Joint.**



14. The remaining joint is part silverside and thick flank with femur bone attached.
Mini Leg of Lamb on the bone

15. **A. Lamb Shank**
B. Mini Leg of Lamb on the bone
C. Lamb Silverside Joint

D. Mini Roast (Topside)
E. Lamb Rump Mini Roasts

